



# FORTIS TRI

## IP65 TRI-PROOF LED BATTEN

WHERE WATERPROOF & DUST PROOF LIGHTING IS NECESSARY



To see 360 degree rotations of this product visit [littil.com.au](http://littil.com.au)

### APPLICATIONS

This IP65 LED tri-proof light is widely used in retail stores, semi-outdoor ceilings, workshops, agriculture sheds, car parks, public places & food processing factories.

The high energy efficiency light source and constant current output design, greatly improve the fixture's life span.

### FEATURES & BENEFITS

- Surface mounted, recessed and suspended options available
- Top and side cable exit options to suit your application
- Versatile, all-in-one **stream line body** with high-density silicon rubber sealing ring protection
- **Unique PVC material** and **stainless steel mounting clips** for easy installation

	15W	35W	43W
--	-----	-----	-----

### GENERAL

Model Number	TriLED15-600	TriLED35-1200	TriLED43-1500
Dimensions (mm)	640 x 124 x 43	1200 x 124 x 43	1500 x 124 x 43
Weight	1.3KG	2.5KG	3.1KG
Sail Area	N/A		
Lighting Category	Linear		
Lifetime	Reported: >35,000hrs & Calculated: Up to 65,000 hrs		
IP & IK Rating	IP65		
Warranty	<b>5 years</b>		
Cable & Plug	1.2m AC Cable		
Storage Temperature	-20 ~ 60°C		
Operating Temperature	40°C		

### OPTICAL

Beam Angle	120°		
Lumens	1500lm	3500lm	4300lm
LED Type	HONGLI SMD 2835		
No. of LEDs	168	432	528
LED Colour Temperature	4000K, 5000K		
Colour Rendering Index	>80		

### ELECTRICAL

Driver Type	Internal		
Voltage	220 - 240 VAC, 50/60 Hz		
Power Factor	>0.9		
Inrush Current	N/A	N/A	N/A
Output Voltage	60-80Vdc		
Output Current	0.125A	0.48A	0.58A
Dimming	Non-Dimmable		
Sensor capability	No		

### COMPLIANCE



AS/NZS 60598.1  
AS/NZS 60598.2.1


ISO 9001



### SKU

### ORDERING

Fortis TriProof 15W 640 4K ND	9343907002252
Fortis TriProof 35W 1200 4K ND	9343907002253
Fortis TriProof 43W 1500 4K ND	9343907002254
Fortis TriProof 35W 1200 5K ND	9343907002504




# FORTIS TRI


## IP65 TRI-PROOF LED BATTEN

LUMINOUS INTENSITY DISTRIBUTION FOR FORTIS TRIPROOF


**15W/ UGR<24/ 100LM/W**

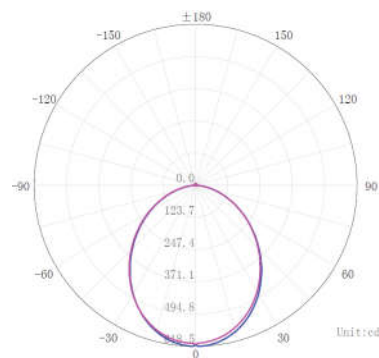


Total Flux: 1497lm

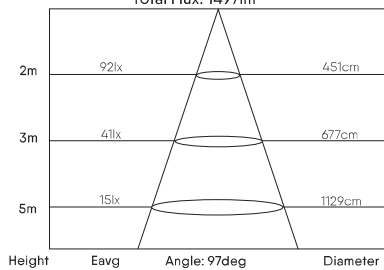


**35W/ UGR<22/ 100LM/W**

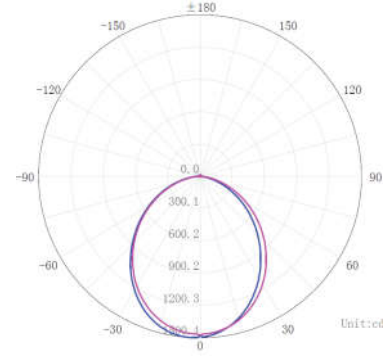


Total Flux 4753lm

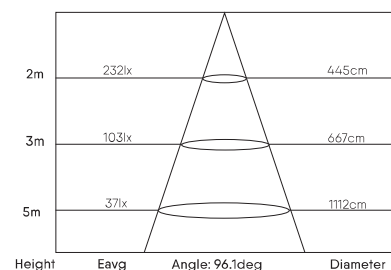

**45W/ UGR<21/ 100LM/W**


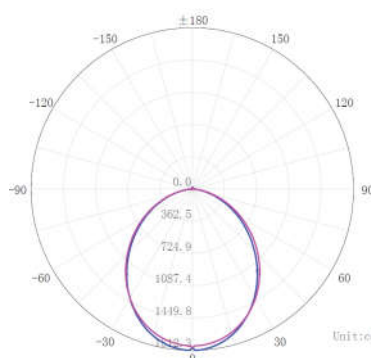


Total Flux: 6649lm

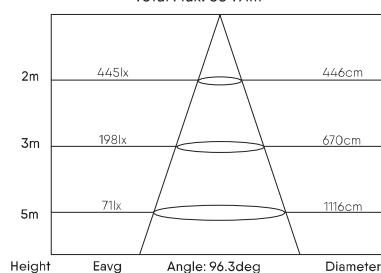


## DIMENSIONAL DRAWINGS

### TriLED15-600

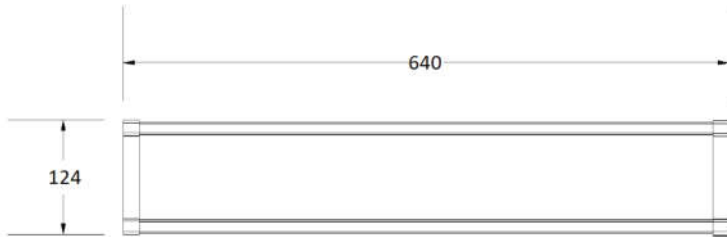

### TriLED35-1200

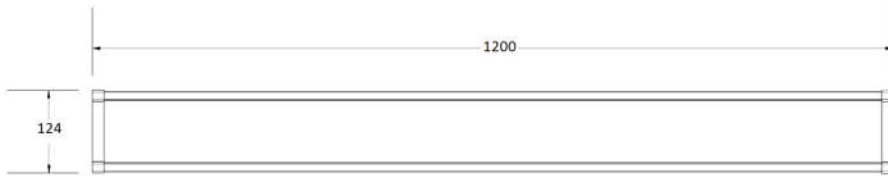

### TriLED43-1500

