

FORTIS MULTA

IP20 BATTEN

REPLACING TRADITIONAL FLUORESCENT BATTENS



APPLICATIONS

Our FORTIS MULTA batten is a direct replacement for traditional fluorescent batten fittings. Our batten is widely used in different environments including retail stores, workshops, schools and other indoor applications. It offers unparalleled flexibility with its Tricolor and Quad power functionality.

FEATURES & BENEFITS

- Tri-colour and Quad power means one Product covers 12 variants.
- Unique housing design and large terminal blocks for easy installation and maintenance.
- High luminous efficacy of 110lm/w.
- High Quality Osram/Boke Driver with 5 years warranty.
- Optional motion sensor capabilities

9W-15W

17W-30W

GENERAL

Model Number	FORTIS-MULTA-9-15W-620D	FORTIS-MULTA-MS-9-15W-620D	FORTIS-MULTA-17-30W-1220D	FORTIS-MULTA-MS-17-30W-1220D
Dimensions (mm)	620		1220	
Weight(Kg)	1.5KG	1.6KG	1.7KG	1.8KG
Category	Batten			
Lifetime (L70)	Reported:>54,000hrs & Calculated: Up to 54,000hrs			
IP Rating	IP20			
Warranty	5 years			
Cable & Plug	NO Cable & Plug			
Storage Temperature	-20°C ~ 65°C			
Operating Temperature	45°C			

OPTICAL

Beam Angle	120°			
Lumens	990/1210/1430/1650 lm		1870/2310/2750/3300 lm	
LED Type	Runlite			
No. of LED's	144		288	
LED Colour Temp	3000K/4000K/5000K			
CRI	>80			

ELECTRICAL

Driver Type	Internal Osram ® Driver	Internal BOKE ® Driver	Internal Osram ® Driver	Internal BOKE ® Driver
Input Voltage	220-240 VAC, 50/60 Hz	200-240 VAC, 50/60 Hz	220-240 VAC, 50/60 Hz	200-240 VAC, 50/60 Hz
Power Factor	>0.9			
Input Current (A)	0.075		0.15	
Inrush Current	18A			
Output Voltage	25-54Vdc	3.02-42Vdc	55-120Vdc	3.02-42Vdc
Dimming	Non-Dimmable	0-10V	Non-Dimmable	0-10V

COMPLIANCE

AS/NZS 60598.1
AS/NZS 60598.2.1

ISO 9001

**SKU****ORDERING**

FORTIS-MULTA-9-15W-620D	9343907000483
FORTIS-MULTA-17-30W-1220D	9343907000484
FORTIS-MULTA-MS-9-15W-620D	9343907000486
FORTIS-MULTA-MS-17-30W-1220D	9343907000487

BATTENS





FORTIS MULTA

IP20 BATTENS

LUMINOUS INTENSITY DISTRIBUTION FOR FORTIS MULTA

9-15W/110LM/W/4000K


17-30W/110LM/W/4000K

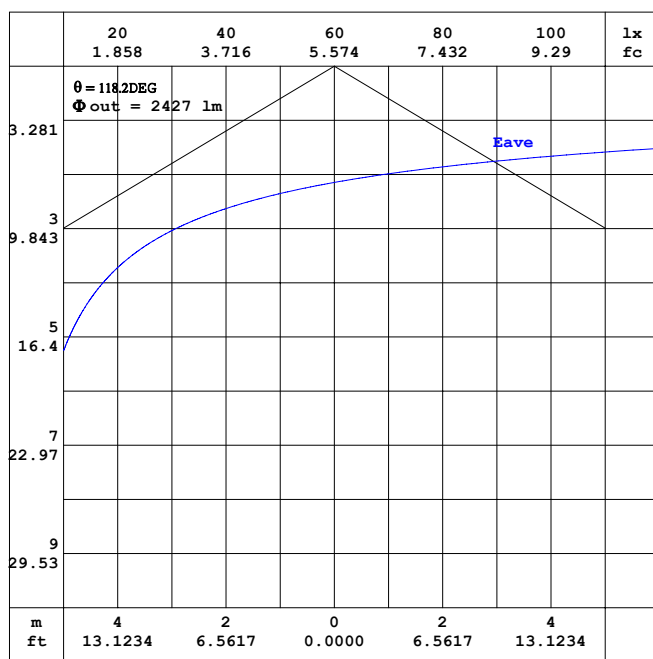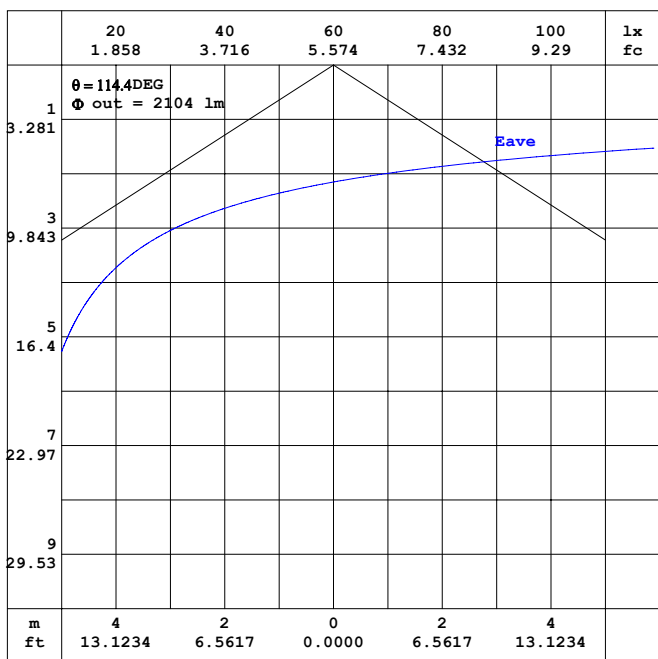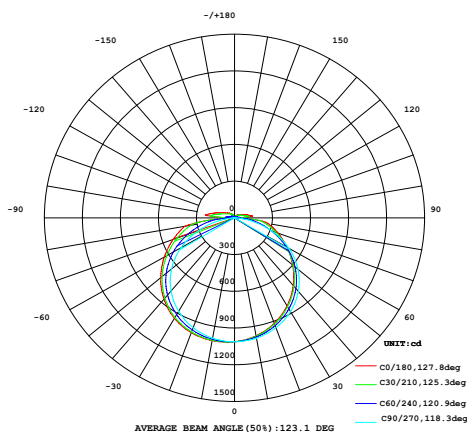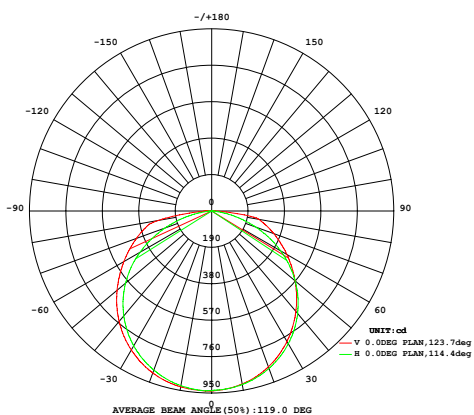

Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

DIMENSIONAL DRAWINGS

FORTIS-MULTA-9-15W-620D/FORTIS-MULTA-MS-9-15W-620D

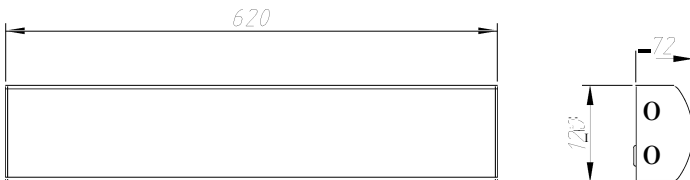

FORTIS-MULTA-15-30W-1220D/FORTIS-MULTA-MS-15-30W-1220D

